


## Dialogic® Diva® BRI Media Boards

The Dialogic® Diva® BRI (ISDN Basic Rate Interface) Media Boards provide one and four ISDN BRI ports and can serve as an excellent communication platform, which scales from 2 to 64 channels (phone lines) per single server.

This datasheet discusses the following products:

- Dialogic® Diva® UM-BRI-2 Media Board (PCIe version only)
- Dialogic® Diva® UM-4BRI-8 Media Board (PCIe version only)
- Dialogic® Diva® BRI-2 Media Board (PCIe version only)
- Dialogic® Diva® 4BRI-8 Media Board (PCI and PCIe version)

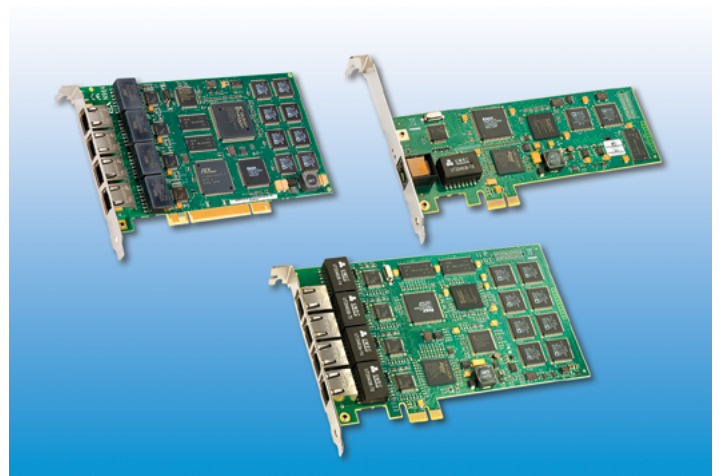

### Features

**Onboard CPU with large RAM and powerful FPGA chip for fast data streaming between the host CPU, the DSPs, the phone line, and the other active components onboard**

**One powerful DSP dedicated to each communications channel**

**Sophisticated hardware design**

**Conforms to plug-and-play standards**

**Implements most supplementary services, many signaling protocols, as well as all multinational ISDN protocols**

**Voice packetization into Real-time Transport Protocol (RTP), adaptive jitter buffer, voice compression (G.726, GSM), and Comfort Noise Generation (CNG) available**

**Supports the same programming interfaces as other Dialogic® Diva® Media Boards, including CAPI, Dialogic® Diva® APIs and others**

**Up to eight Diva Media Boards of the same or different types can operate concurrently in a single server**

### Benefits

Can remove performance bottlenecks by offloading key real-time tasks that would ordinarily place an excessive burden on the host server, allowing Quality of Service (for example, voice quality and connection speed) to be more consistent

Provides real-time processing of complex operations (such as V.90 data modem, V.34 fax receiver and transmitter, voice compression, or echo cancellation) without reducing overall system performance, which lowers implementation costs

Operates with low power consumption

Permits easy installation and operation

Allows applications compatibility with major PBXs and can make a system based on Dialogic® Diva® technology ready for worldwide use

Permits legacy voice, speech, and conferencing applications to be used with VoIP clients and IP phones

Reduces porting efforts and time to market by making Diva Media Boards compatible with most standard telephony and communications applications

Easy scalability and flexibility to address an organization's communications needs in changing environments, such as VoIP



The Diva BRI offer voice, speech, conferencing, VoIP, modem and fax features, and can serve as a base for many communication applications. The boards support many standard applications, and are also suitable for new application development. The Diva BRI are available in Low Profile or Half Size form factors. The Diva BRI can be seamlessly combined with other Dialogic® Diva® Media Boards, such as analog, E1/T1, ISDN PRI, and VoIP.

The Diva 4BRI-8 PCI board shares the same features with its PCI Express (PCIe) version, so that the migration from PCI Server hardware to PCI Express hardware is easy. Sometimes it will be beneficial to be able to use PCI and PCIe versions in the same server.

The Diva BRI support the same set of application interfaces as other Diva Media Boards: the three Dialogic® Diva® APIs as well as CAPI, COM port, WAN Miniport and TTY. Because of this consistent interface support, applications written for another Diva Media Board will normally work without modification with Diva BRI.

The Diva UM-BRI-2 and UM-4BRI-8 support fax transmissions on half (50%) of their available channels. The feature-set of the Diva UM series has been designed to meet the needs of typical Unified Messaging applications.

The Diva BRI-2 and 4BRI-8 boards support V.34 fax transmissions on all (100%) available channels. The Diva BRI-2 and 4BRI-8 boards are usually referred to as part of the Universal series.

## Technical Specifications

### Quick Reference

Voice resources	2 or 8
Fax resources	2 or 8 (Universal series) and 1 or 4 (UM series)
Conferencing resources	2 or 8
Maximum boards/system	8 (tested by Dialogic); more than 8 are possible (application and server dependent)
CSP	Yes
Form factor	Low Profile: 1-port PCIe; Half Size: 4-port PCI/PCIe
Resource bus	PCI rev 2.2 33 MHz or PCI Express 1.0a x1 lane (3.3/12 V)
Connection	1 or 4 RJ-45 connectors
Network interface	ISDN BRI (Basic Rate Interface) in TE and NT Mode
Signaling	ETSI, NI-1, 4ESS, 5ESS, and all major ISDN protocols; QSIG; and more
Operating system	Windows and Linux. Details at <a href="http://www.dialogic.com/systemreleases">http://www.dialogic.com/systemreleases</a>
Volts	PCI: 5; PCI Express: 3.3 and 12
Required accessories	None

### Hardware

- 32-bit RISC CPU, 100 MHz, 131 MIPS
- 2 or 8 DSPs (32.76 MHz and 65 MIPS)
- Onboard SDRAM Memory: 16MB (4-port, PCI), 64MB (1-/4-port PCIe)
- Telephony interface:
  - 1 x RJ-45 (1-port), RJ-45/RJ-45 cable supplied
  - 4 x RJ-45 (4-port), RJ-45/RJ-45 cables supplied

- Physical dimensions:
  - 1-port PCIe: 167.65 mm x 64.41 mm (PCB)
  - 1-port PCIe: 181.36 mm x 80.06 mm (with Low Profile bracket)
  - 1-port PCIe: 180.96 mm x 120.88 mm (with standard bracket)
  - 4-port PCI/PCIe: 174.63 mm x 106.86 mm (PCB)
  - 4-port PCI/PCIe: 187.84 mm x 126.37 mm (with standard bracket)
- High-impedance mode for passive monitoring
- I/O addresses, memory and interrupt allocated automatically
- Plug-and-play interface
- PCI: PCI 2.2, 33 MHz, 32 bit (also supports 64 bit dual address cycle DMA), 5 V supply required, 3.3 V, or 5 V universal signaling, supported in backwards compatible PCI-X slots
- Production quality: ISO 9002

### Power Consumption and Environmental

- Power consumption:
  - 1-port PCIe: 0.27A @ +3.3 V and 0.17A @ 12 V (typical)
  - 4-port PCI: 0.58A @ +5 V (typical)
  - 4-port PCIe: 0.42A @ +3.3 V and 0.19A @ 12 V (typical)
- Operating temperature: 10°C to 50°C
- Storage temperature: 0°C to 70°C
- Maximum tolerance in voltage fluctuation: According to the respective PCI or PCI Express specification

### Dialogic® Diva® System Release Software and Dialogic® Diva® SDK Software

- Supported operating systems: Windows and Linux. Details at <http://www.dialogic.com/systemreleases>
- M-adapter feature (Dialogic patented technology): Combined Virtual Adapter, Internal Call Transfer, Explicit Call Transfer Emulation
- SNMP support:
  - Windows: v2c
  - Linux: Net-SNMP v1, v2c and v3
- Application interfaces (provided by Dialogic Diva System Release Software and Dialogic Diva SDK):
  - Microsoft: Diva API, Diva API for .NET, Diva Component API (VB.NET), COM Port, WAN Miniport, CAPI 2.0, extended CAPI, VoIP (SIP/RTP)
  - Linux: Diva API, TTY, CAPI 2.0, extended CAPI, VoIP (SIP/RTP)

### Features - Signaling

- DSS1 (Euro-ISDN), NI-1 (North America National ISDN 1), 5ESS (North America), 1TR6 (Germany), INS Net 64 (Japan), VN3 (France), CT1 (Belgium), QSIG
- Call progress analysis:
  - Busy tone detection
  - Ring back tone detection
  - Special Information Tone (SIT) detection
  - Fax/modem detection
  - Dial tone detection
- ISDN supplementary services:
  - Number identification services (CLIP, CLIR, COLP, COLR, KEY, MSN, DDI, SUB)
  - Call offering services (TP, CFU, CFB, CFNR)
  - Call completion services (CW, HOLD, ECT)
  - Charging services (AoC)
  - Three-party conference
  - Large conference

## Features – Media Processing

- Voice and speech:
  - G.711 coding (A-law,  $\mu$ -law selectable)
  - DTMF detection, generation, clamping and filtering
  - Generic tone detection and generation
  - Pulse tone detection
  - Full-duplex voice, barge-in
  - Voice Activity Detection (VAD)
  - Silence detection
  - Human talker detection
  - Recording Automatic Gain Control (AGC)
  - Pitch control
  - Audio tap
  - G.168 echo cancellation, up to 128 ms tail length
- Voice over IP (VoIP):
  - G.711 voice coder (64 kbps,  $\mu$ -law, A-law)
  - G.726 voice coder (32 kbps)
  - G.729 voice coder (VoIP licenses required)
  - GSM voice coder (13 kbps)
  - Adaptive jitter buffer
  - Voice Activity Detection (VAD)
  - Comfort Noise Generation (CNG)
  - Real-time Transport Protocol (RTP) framing
  - G.168 echo cancellation, up to 128 ms tail length
- Switching and conferencing:
  - Onboard and cross-board switching and (large) conferencing via line interconnect (call tromboning)
  - Automatic Gain Control (AGC)
- Support for Fax Class 1 and 2
- Support for Fax Group 3, T.30:
  - V.17, V.29, V.27ter, V.21, V.34 modulation
  - Fax polling/ fax on demand
  - Up to 33.6 kbps with each channel (send and receive)
  - Page formats: ISO A4, B4, A3
  - Fax compression MH, MR, MMR
  - Error Correction Mode (ECM)
  - Standard, fine, super-fine and ultra-fine resolution
  - Color fax (JPEG-format)
- Data modem (Remote Access, POS and other Low Bit Rate (LBR) applications):
  - V.21, V.22, V.22bis, Bell 103, Bell 212A, V.32, V.32bis, V.34, V.42, V.42bis, V.90, MNP4, MNP5, V.110, V.120
  - Modem with extension: V.18, V.21, Bell 103, V.23, EDT, Baudot45/47/50 incl. DTMF, V.42, V.42bis
  - B-channel protocols: Transparent HDLC, Transparent Voice, Synchronous PPP and MLPPP, X.75 (LAPB), X.75/V.42bis, LAPD, T.90NL, T.70NL, X.25, X.31, Rate adaption (56 kbps), PIAFS 1.0 / 2.0, SDLC

## Approvals, Compliance and Warranty

Environmental Information

<http://www.dialogic.com/en/company/environmental-policy.aspx>

Country-specific safety and telecom approvals

<http://www.dialogic.com/declarations>

Warranty Information

<http://www.dialogic.com/warranties>

## Ordering Information

Please see the [BRI-2 Ordering Information](#) tab for these products

Please see the [4BRI-8 Ordering Information](#) tab for these products



[www.dialogic.com](http://www.dialogic.com)

For a list of Dialogic locations and offices, please visit: <https://www.dialogic.com/contact.aspx>

Dialogic, Diva, and SIPcontrol are either registered trademarks or trademarks of Dialogic Corporation, and its affiliates or subsidiaries ("Dialogic"). Dialogic's trademarks may be used publicly only with permission from Dialogic. Such permission may only be granted by Dialogic's legal department at 6700 Cote-de-Liesse Road, Suite 100, Borough of Saint-Laurent, Montreal, Quebec, Canada H4T 2B5. The names of actual companies and products mentioned herein are the trademarks of their respective owners.

Dialogic encourages all users of its products to procure all necessary intellectual property licenses required to implement their concepts or applications, which licenses may vary from country to country. None of the information provided in this Datasheet other than what is listed under the section entitled Technical Specifications forms part of the specifications of the product and any benefits specified are not guaranteed. No licenses or warranties of any kind are provided under this product brief.

Dialogic may make changes to specifications, product descriptions, and plans at any time, without notice.

Any use case(s) shown and/or described herein represent one or more examples of the various ways, scenarios or environments in which Dialogic® products can be used. Such use case(s) are non-limiting and do not represent recommendations of Dialogic as to whether or how to use Dialogic products.

This document discusses one or more open source products, systems and/or releases. Dialogic is not responsible for your decision to use open source in connection with Dialogic products (including without limitation those referred to herein), nor is Dialogic responsible for any present or future effects such usage might have, including without limitation effects on your products, your business, or your intellectual property rights.

