


## Diallogic® D/82JCT-U PBX Integration Board

The Diallogic® D/82JCT-U PBX integration board offers advanced digital connectivity to many popular private branch exchanges (PBXs) for unified and Internet-ready call, voice, and fax processing applications in small- to medium-sized enterprises. It is available in a PCI and a PCI Express (PCIe) version.

Featuring programmable soft-ports capable of supporting voice, fax, call handling, and host-based speech technologies, the D/82JCT-U reduces the cost of ownership for systems requiring multimedia functionality. The universal PBX interface of the D/82JCT-U offers downloadable firmware for a selection of widely used telephone equipment switches. Support for advanced PBX features such as called and calling number identification, message waiting notification, busy lamp fields, and disconnect supervision is useful for developing unified messaging, interactive voice response (IVR), and call management solutions.

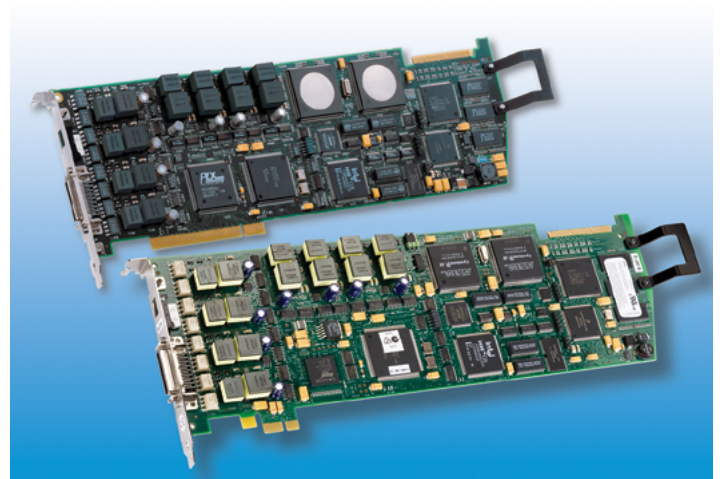

By choosing the D/82JCT-U for enterprise applications, developers eliminate the complexities associated with analog or T1 integration, as well as costly investments in proprietary computer-telephone integration (CTI) links.

Features	Benefits
<b>Eight digital interfaces to Avaya, Mitel, NEC Nortel, and Siemens switches</b>	Allows connection to popular PBX models by leading manufacturers
<b>Digital interfaces to the PBX</b>	Enables tight, direct switch integration that eliminates the need for expensive digital/analog conversion cards or serial ports
<b>Access to switch information</b>	Supports important PBX features such as ANI, DNIS, date/time, and reason for call redirection
<b>Advanced digital connectivity</b>	Provides more information from the PBX than analog connection without the need for separate links and third-party call control
<b>Phone-emulated supervised/unsupervised transfers and disconnect supervision</b>	Allows faster, more reliable transfers than analog connection
<b>Supports GSM and G.726, the coders of choice for Internet-ready unified messaging applications</b>	Enables messaging integration with many popular email servers and applications
<b>Two channels of Softfax per card, sharable across CT Bus</b>	Provides scalable fax capability at a low cost by eliminating the need for additional fax hardware



## PBXs Supported

Manufacturers	Phone Emulations	PBX Switches
Avaya	7434 (4-wire)	DEFINITY, System 75/85
Avaya	8434 (2-wire)	DEFINITY (G3 V4 and higher)
Mitel	Superset 420	SX-50
Mitel	Superset 430	SX-200ML, SX-2000
NEC	DTERM 111	NEAX 2400, NEAX 2000 IVS, IVS2, IPS, Electra Elite, Electra Professional
Nortel Networks	M2616	Meridian 1
Nortel Networks	M7324	Norstar DR5, CICS, MICS
Siemens	Optiset E	Hicom
Siemens	ROLMphone 400 (RP 400)	CBX 9005, 9006, 9751

## Technical Specifications

Voice resources	8
Fax resources	2
Conferencing resources	0
CSP	Yes
Form factor	PCIU; PCIe x1
Physical Dimensions	Standard-height, full length form factor 12.28 in. (31.2 cm) long 4.2 in. (10.67 cm) high
Resource bus	CT Bus
Connection	Digital
Network interface	Avaya, Mitel, NEC, Nortel, Siemens
Signaling	Digital PBX
Operating system	Linux, Windows. Details at <a href="http://www.dialogic.com/systemreleases">http://www.dialogic.com/systemreleases</a>
Volts	PCI: 3.3 V, 5 V; PCIe: 3.3 V, 12 V
Required accessories	D82UCABLE; cable connects board to PBX

## Approvals, Compliance and Warranty

Environmental Information	<a href="http://www.dialogic.com/en/company/environmental-policy.aspx">http://www.dialogic.com/en/company/environmental-policy.aspx</a>
Country-specific safety and telecom approvals	<a href="http://www.dialogic.com/en/products/others/declarations.aspx">http://www.dialogic.com/en/products/others/declarations.aspx</a>
Warranty information	<a href="http://www.dialogic.com/warranties">http://www.dialogic.com/warranties</a>

# Dialogic®

[www.dialogic.com](http://www.dialogic.com)

For a list of Dialogic locations and offices, please visit: <https://www.dialogic.com/contact.aspx>

Dialogic is a registered trademark of Dialogic Corporation and its affiliates or subsidiaries ("Dialogic"). Dialogic's trademarks may be used publicly only with permission from Dialogic. Such permission may only be granted by Dialogic's legal department at 6700 Cote-de-Liesse Road, Suite 100, Borough of Saint-Laurent, Montreal, Quebec, Canada H4T 2B5. The names of actual companies and products mentioned herein are the trademarks of their respective owners.

Dialogic encourages all users of its products to procure all necessary intellectual property licenses required to implement their concepts or applications, which licenses may vary from country to country. None of the information provided in this Datasheet other than what is listed under the section entitled Technical Specifications forms part of the specifications of the product and any benefits specified are not guaranteed. No licenses or warranties of any kind are provided under this datasheet.

Dialogic may make changes to specifications, product descriptions, and plans at any time, without notice.

Any use case(s) shown and/or described herein represent one or more examples of the various ways, scenarios or environments in which Dialogic® products can be used. Such use case(s) are non-limiting and do not represent recommendations of Dialogic as to whether or how to use Dialogic products.

