


Dialogic® Diva® V-xPRI Media Boards

The Dialogic® Diva® V-xPRI Media Boards provide one/two/four/eight E1, T1, J1 or ISDN PRI ports (trunks) and can serve as an excellent communication platform, which scales from 24 to 960 channels (phone lines) per single server.

This datasheet discusses the following products:

- Dialogic® Diva® V-1PRI/E1/T1-30 HS Media Board (PCIe version)
- Dialogic® Diva® V-2PRI/E1/T1-60 HS Media Board (PCIe version)
- Dialogic® Diva® V-4PRI/E1/T1-120 HS Media Board (PCIe version)
- Dialogic® Diva® V-4PRI/E1/T1-120 FS Media Board (PCIe version)
- Dialogic® Diva® V-8PRI/E1/T1-240 FS Media Board (PCIe version)

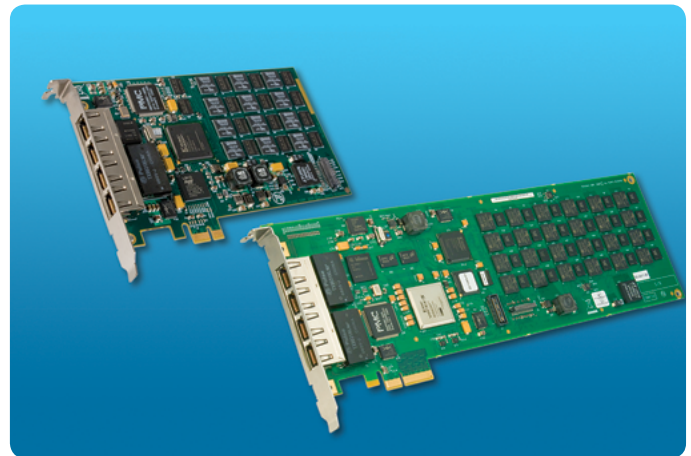

Features	Benefits
Onboard CPU with large RAM and powerful FPGA chip for fast data streaming between the host CPU, the DSPs, the phone line, and the other active components onboard	Can remove performance bottlenecks by offloading key real-time tasks that would ordinarily place an excessive burden on the host server, allowing Quality of Service (for example, voice quality and connection speed) to be more consistent
Depending on the version of the Diva V-xPRI Media Board, 3, 5, 6 or 12 powerful DSPs are available per trunk (E1/T1/J1/ISDN PRI)	Provides real-time processing of complex operations (such as V.90 data modem, V.34 fax receiver and transmitter, voice compression, or 256 ms echo cancellation) without reducing overall system performance, which lowers implementation costs
Sophisticated hardware design	Operates with low power consumption
Conforms to plug-and-play standards	Permits easy installation and operation
Implements most supplementary services, many signaling protocols, as well as all multinational ISDN protocols	Allows application compatibility with major PBXs and can make a system based on Dialogic® Diva® technology ready for worldwide use
Voice packetization into Real-time Transport Protocol (RTP), adaptive jitter buffer, voice compression (AMR-NB, G.726, RTAudio, GSM), and Comfort Noise Generation (CNG) available	Permits legacy voice, speech, and conferencing applications to be used with VoIP clients and IP phones
Supports the same programming interfaces as other Dialogic® Diva® Media Boards, including Dialogic® Diva® APIs, CAPI, TTY, COM port, and others	Reduces porting efforts and time to market by making Diva Media Boards compatible with most standard telephony and communications applications
Four Diva Media Boards of the same or different types can operate concurrently in a single server, depending on slot availability	Easy scalability and flexibility to address an organization's communications needs in changing environments, such as VoIP
Upgrades available via additional licenses	Can be upgraded to support modem, fax, and VoIP coders

Dialogic® Diva® V-xPRI Media Boards

The Diva V-xPRI offer voice, speech, conferencing, VoIP, modem and fax features and can serve as a base for many communication applications. The boards support many standard applications, and are also suitable for new application development. The Diva V-xPRI are available in half length and full length PCI Express form factor. The half length version has 12 DSPs and comes in versions for 1, 2, and 4 trunks. The full length version has 24 DSPs and comes in versions for 4 and 8 trunks. The Diva V-xPRI can be seamlessly combined with other Dialogic® Diva® Media Boards, such as those supporting Analog, ISDN BRI, and VoIP.

PCI and PCIe versions can be used in the same server providing both can be physically supported by the server.

The Diva V-xPRI support the same set of application interfaces as other Diva Media Boards: the three Dialogic® Diva® APIs as well as CAPI, COM port, WAN Miniport and TTY. Although Diva Media Boards share the same interfaces, the Diva V-xPRI are the only ones that have the flexibility to allow a customer to upgrade the initial "V-series" voice feature set with four additional software licenses at any time:

- Modem — Offering modem connections up to V.90 speeds
- VoIP — Offering VoIP CODECs (AMR-NB, G.729, RTaudio)
- G.723 — Offering the G.723 CODEC
- Fax — Offering V.34 fax up to 33.6 kbps speeds

Because of consistent interface support, applications written for another Diva Media Board with comparable functionality will normally work without modification with the Diva V-xPRI Media Boards.

Technical Specifications

Quick Reference

Voice resources	All channels
Fax resources (Fax)	All channels via Fax licenses (V.34 speeds are only possible on part of the channels when using the Diva V-4PRI/E1/T1-120 HS or the Diva V-8PRI/E1/T1-240 FS, because these boards have only 3 DSPs per trunk.)
Conferencing resources	All channels
Max. boards per server	4 (QA tested by Dialogic); up to 8 may be possible — application and server-dependent
CSP	Yes
Form factor	PCIe: half length (1, 2, 4 trunks); full length (4, 8 trunks)
Resource bus	PCIe: half length 1.0a x1 lane (3.3/12 V); full length 1.0a x4 lane (3.3/12 V)
Connection	4 RJ-45 connectors
Network interface	E1/T1/J1 and ISDN PRI (Primary Rate Interface) in TE and NT Mode
Signaling	ETSI, NI-1, 4ESS, 5ESS, and all major ISDN protocols; QSIG; and more
Operating system	Windows and Linux. Details at www.dialogic.com/systemreleases
Volts	3.3 and 5
Required accessories	1, 2, 4, or 8 shielded RJ-45/RJ-45 cables; V-8PRI requires 4 RJ45 Y-Cables

Hardware

- 64-bit RISC CPU, 466 MHz, 1070 MIPS with 64 MB SDRAM
- 16/32-bit DSPs, 600 MHz, 1200 MIPS with 32 MB SDRAM per installed DSP
- Half length: 12 DSPs (Diva V-1PRI, Diva V-2PRI, Diva V-4PRI)
- Full length: 24 DSPs (Diva V-4PRI, Diva V-8PRI)
- 384, 448, 704, or 896 MB onboard SDRAM
- Physical dimensions:
 - Full height, half length: 167.65 mm x 111.15 mm (PCB); 180.96 mm x 126.31 mm (including bracket)
 - Full height, full length: 311.81 mm x 111.15 mm (PCB); 352.17 mm x 126.31 mm (including bracket and retainer)
- High-impedance mode for passive monitoring ("line tapping via HiZ mode")
- I/O addresses, memory, and interrupt allocated automatically
- Plug-and-play interface
- Production quality: ISO 9002

Power Consumption and Environmental

- Power consumption:
 - Half length: V-1PRI, V-2PRI, V-4PRI: 0.91 A @ 3.3 V (maximum), 1.00 A @ 12 V (maximum)
 - Full length: V-4PRI, V-8PRI: 1.38 A @ 3.3 V (maximum), 1.57 A @ 12 V (maximum)
- Operating temperature: 10°C to 50°C
- Storage temperature: 0°C to 70°C
- Maximum tolerance in voltage fluctuation: According to the PCI Express specification

Dialogic® Diva® System Release Software and Dialogic® Diva® SDK Software

- Supported operating systems: Windows and Linux. Details at www.dialogic.com/systemreleases
- M-adapter feature (Dialogic patented technology): Combined Virtual Adapter, Internal Call Transfer, Explicit Call Transfer Emulation
- SNMP support:
 - Windows: v2c
 - Linux: Net-SNMP v1, v2c and v3
- Application interfaces (provided by Diva System Release Software and Diva SDK Software):
 - Microsoft: Diva API, Diva API for .NET, Diva Component API (VB.NET), COM Port, WAN Miniport, CAPI 2.0, extended CAPI, VoIP (SIP/RTP)
 - Linux: Diva API, TTY, CAPI 2.0, extended CAPI, VoIP (SIP/RTP)

Features – Signaling

- DSS1 (Euro-ISDN), NI-1 (North America National ISDN 1), 5ESS (North America), 1TR6 (Germany), INS Net 64 (Japan), VN3 (France), CT1 (Belgium), QSIG
- Call progress analysis:
 - Busy tone detection
 - Ring back tone detection
 - Special Information Tone (SIT) detection
 - Fax/modem detection
 - Dial tone detection
- ISDN supplementary services:
 - Number identification services (CLIP, CLIR, COLP, COLR, KEY, MSN, DDI, SUB)
 - Call offering services (TP, CFU, CFB, CFNR)
 - Call completion services (CW, HOLD, ECT)
 - Charging services (AoC)
 - Three-party conference
 - Large conference

Features – Media Processing

NOTE: The activation of some features requires the installation of chargeable software licenses. Depending on the selection of features and on the selected Diva Media Board, it may be possible that not all features are available at the same time on all channels. Please consult more detailed information available as a Technical Brief on this topic, or contact your Dialogic sales representative.

- Voice and speech:
 - G.711 coding (A-law, μ -law selectable)
 - DTMF detection, generation, clamping, and filtering
 - Generic tone detection and generation
 - Pulse tone detection
 - Full-duplex voice, barge-in
 - Voice Activity Detection (VAD)
 - Silence detection
 - Human talker detection
 - Recording Automatic Gain Control (AGC)
 - Pitch control
 - Audio tap
 - G.168 echo cancellation, up to 256 ms tail length

- Voice over IP (VoIP):
 - AMR-NB voice coder (VoIP licenses required) *
 - G.729 voice coder (VoIP licenses required)
 - G.723 voice coder (G.723 licenses required)
 - RTAudio voice coder (VoIP licenses required)
 - iLBC voice coder (free)
 - G.711 voice coder (64 kbps, μ -law, A-law)
 - G.726 voice coder (32 kbps)
 - GSM voice coder (13 kbps)
 - Adaptive jitter buffer
 - Voice Activity Detection (VAD)
 - Comfort Noise Generation (CNG)
 - Real-time Transport Protocol (RTP) framing
 - G.168 echo cancellation, up to 256 ms tail length

* Using the AMR-NB resource in connection with a Diva product does not grant the right to practice the AMR-NB standard. To seek a patent license agreement to practice the standard in connection with a Diva product, contact the VoiceAge Corporation at licensing@voiceage.com.

- Switching and conferencing:
 - Onboard and cross-board switching and (large) conferencing via line interconnect (call tromboning)
 - Automatic Gain Control (AGC)
- Support for Fax class 1 and 2 (fax licenses required)
- Support for Fax Group 3, T.30 (fax licenses required):
 - V.17, V.29, V.27ter, V.21, V.34 modulation
 - Fax polling/ fax on demand
 - Up to 33.6 kbps with each channel (send and receive)
 - Page formats: ISO A4, B4, A3
 - Fax compression MH, MR, MMR
 - Error Correction Mode (ECM)
 - Standard, fine, super-fine and ultra-fine resolution
 - Color fax (JPEG-format)
- Data modem (RAS, POS and other Low Bit Rate (LBR) applications) (modem licenses required):
 - V.21, V.22, V.22bis, Bell 103, Bell 212A, V.32, V.32bis, V.34, V.42, V.42bis, V.90, MNP4, MNP5, V.110, V.120
 - Modem with extension: V.18, V.21, Bell 103, V.23, EDT, Baudot45/47/50 incl. DTMF, V.42, V.42bis
 - B-channel protocols: Transparent HDLC, Transparent Voice, Synchronous PPP and MLPPP, X.75 (LAPB), X.75/V.42bis, LAPD, T.90NL, T.70NL, X.25, X.31, Rate adaption (56 kbps), PIAFS 1.0 / 2.0, SDLC

Approvals, Compliance, and Warranty

Environmental Information <http://www.dialogic.com/en/company/environmental-policy.aspx>

Country-specific safety and telecom approvals <http://www.dialogic.com/declarations>

Warranty Information <http://www.dialogic.com/warranties>

The half length Diva Media Boards V-1PRI, V-2PRI and V-4PRI may be approved as VPRIHS.

The full length Diva Media Boards V-4PRI and V-8PRI may be approved as VPRIFS.

Ordering Information

Please see the [Ordering Information](#) tab for these products.



www.dialogic.com

For a list of Dialogic locations and offices, please visit: <https://www.dialogic.com/contact.aspx>

Dialogic, Diva, and SIPcontrol are either registered trademarks or trademarks of Dialogic Corporation, and its affiliates or subsidiaries ("Dialogic"). Dialogic's trademarks may be used publicly only with permission from Dialogic. Such permission may only be granted by Dialogic's legal department at 6700 Cote-de-Liesse Road, Suite 100, Borough of Saint-Laurent, Montreal, Quebec, Canada H4T 2B5. The names of actual companies and products mentioned herein are the trademarks of their respective owners.

Dialogic encourages all users of its products to procure all necessary intellectual property licenses required to implement their concepts or applications, which licenses may vary from country to country. None of the information provided in this Datasheet other than what is listed under the section entitled Technical Specifications forms part of the specifications of the product and any benefits specified are not guaranteed. No licenses or warranties of any kind are provided under this product brief.

Dialogic may make changes to specifications, product descriptions, and plans at any time, without notice.

Any use case(s) shown and/or described herein represent one or more examples of the various ways, scenarios or environments in which Dialogic® products can be used. Such use case(s) are non-limiting and do not represent recommendations of Dialogic as to whether or how to use Dialogic products.

This document discusses one or more open source products, systems and/or releases. Dialogic is not responsible for your decision to use open source in connection with Dialogic products (including without limitation those referred to herein), nor is Dialogic responsible for any present or future effects such usage might have, including without limitation effects on your products, your business, or your intellectual property rights.